



IV. Installation Method

1. Connection between power adaptor and LED lighting unit

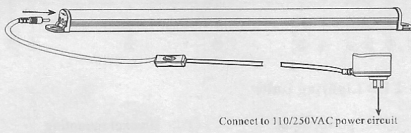

2. Rack mounting of LED lighting unit


It can be horizontally installed with M5 screws and nuts on any proper position of the cabinet, according to the practical needs.

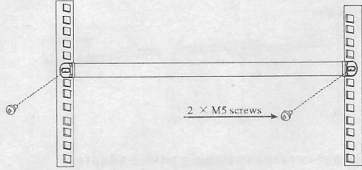

3. Magnetic adsorption of LED lighting unit


LED lighting unit can be adsorbed upon the proper position of cabinet.

Built-in magnetic sucker



4. Hook installation of LED lighting unit

There is a specially designed mounting hook. Please hang one end into the square hole of cabinet, and the other end into the bracket of LED lighting unit.

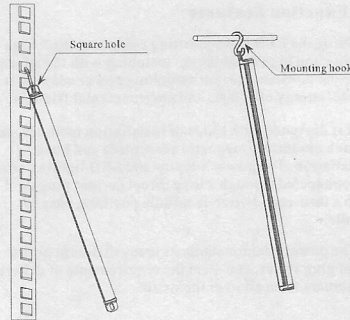

V. Technical Parameters

	Item	Technical parameter
LED Lighting Unit	Rated current	350mA DC
	Rated power	4W
	Luminance	315LM
	LED beads	51
	Light-emitting angle	120 degree
	Product life	30000H
	Color temperature	6000~6500K
	Housing color	Silver
	Cover color	Milky
	Dimension	L×W×H 482.6×23.4×24.5mm
Constant Current Switching Power Adaptor	Rated input voltage	110~240VAC 50/60Hz
	Rated output voltage	12V DC
	Constant output current	350mA DC
	Power output	φ3.5mm DC
	Power cable length	3 M
	On/off Switch	Thru-cord switch
Environment	Working condition	0℃~55℃, 10~90%
	Storage condition	-20℃~+70℃, 10~90%
Fitting	Mounting hook	1